



Nexion
ITALIAN STYLE THAT INSPIRES

STONE | Runa



Nexion interprets Stone

RUNA COLLECTION

Runa collection brings the essence of the noble and sophisticate character of the slates found in the countryside, villages and historical cities of Northern Europe. Stones that blend harmoniously with the elements of nature in a very contemporary style.

Though these stones are common in Europe, finding the nicest one is not easy. Nexion has worked to recreate the taste of those suggestive slates that blend naturally in the architectural works of contemporary urban contexts. By the perfection of design and the hands of skilled craftsmen, Nexion has given to the surface of Runa the character of the best natural stones, strong at sight and gentle at touch.

The result is a ceramic collection that returns the sober and harmonious elegance of slates with a modern and dynamic mood. A collection that brings the best of the inspiring Italian contemporary design to any type of ambience and location.

Nexion about

Nexion is a joint venture company created by Ceramiche Speranza, a best-in-class Italian firm founded in 1961, and Simpolo, since 1977 one of the leading Indian producer of ceramics and sanitary ware.

With mastery of technology and design, we turn the best of the Italian tradition and lifestyle into contemporary ceramic surfaces that can be source of inspiration for architects and designers around the world.

Open-minded and keen to learn from customers and partners, we are committed to deliver the best quality and service and we believe that our work ends when our clients fulfill their desires and achieve their goals.

4 Inspirations

elegant and suggestive colours interpreting the Runa stones.

5 Sizes

5 different sizes suited to the most diverse design requirements.

120x240 cm | 80x160 cm | 60x120 cm | 60x60 cm | 30x60 cm



120x240 cm
F14RNAGONRO Grigio Chiaro



120x240 cm
F14RNAG1NRO Grigio Scuro

Full body-colored porcelain stoneware (international standard) | Vitrified stoneware (indian standard). Rectified | 9 mm thickness



120x240 cm
F14RNABONRO Beige



120x240 cm
F14RNAKONRO Nero



80x160 cm
F86RNAGONRO Grigio Chiaro



80x160 cm
F86RNAG1NRO Grigio Scuro



80x160 cm
F86RNABONRO Beige



80x160 cm
F86RNAKONRO Nero



60x120 cm
F62RNAGONRO Grigio Chiaro



60x120 cm
F62RNAG1NRO Grigio Scuro



60x120 cm
F62RNABONRO Beige



60x120 cm
F62RNAKONRO Nero



60x60 cm
F60RNAGONRO Grigio Chiaro



60x60 cm
F60RNAG1NRO Grigio Scuro



60x60 cm
F60RNABONRO Beige



60x60 cm
F60RNAKONRO Nero



30x60 cm
F63RNAGONRO Grigio Chiaro



30x60 cm
F63RNAG1NRO Grigio Scuro




30x60 cm
F63RNABONRO Beige



30x60 cm
F63RNAKONRO Nero

Surface pattern options

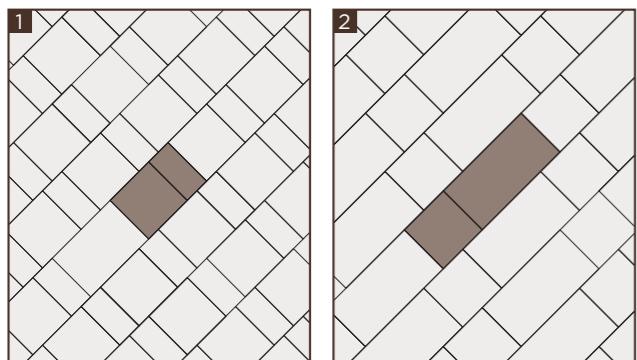

60x60 66,7%
30x60 33,3%

60x120 66,7%
60x60 33,3%

60x120 57,1%
60x60 28,6%
30x60 14,3%

120x240 88,9%
60x60 11,1%

Nexion installation suggestions

Nexion recommends 2 mm joint for optimal aesthetics taking advantage of the tiles caliber in multi-sized applications.

Both cement and epoxy grout can be used; grout-design color matching advisable for optimal aesthetics.

It is not recommended to use grouting with coloured pigments in contrast with the colour of the tiles.

Nexion quality standards

ALL TESTS ARE CARRIED OUT BY ITALIAN LABORATORIES ACCREDITED ACCORDING TO ISO/IEC 17025:2005

Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles.

QUALITY ITEMS	TECHNICAL FEATURE	STANDARD METHOD ISO	REQUIREMENTS		NEXION Values
			%	mm	
DIMENSIONS AND SURFACE QUALITY	LENGTH AND WIDTH	UNI EN ISO 10545-2	±0,6%	±2,0	±0,2% ±2,0
	THICKNESS		±5%	±0,5	±5% ±0,5
	Straightness of sides		±0,5%	±1,5	±0,2% ±1,5
	Rectangularity		±0,5%	±2,0	±0,33% ±1,5
	Flatness		±0,5%	±2,0	±0,26% ±1,5
	SURFACE QUALITY		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant
PHISICAL PROPERTIES	WATER ABSORPTION	UNI EN ISO 10545-3	E _b ≤ 0,5% Individual maximum : 0,6% (absorbed water mass)		Compliant
	BREAKING STRENGTH	UNI EN ISO 10545-4	Min 1300 N	≥ 1800 N (9 mm)	
			Min 700 N	> 700 N (6 mm)	
	MODULUS OF RUPTURE		R ≥ 35 N/mm ² minimum 32 Not applicable to tiles with breaking strength ≥ 3000 N		R ≥ 35 N/mm ²
	FROST RESISTANCE	UNI EN ISO 10545-12	Required		Compliant
	COEFFICIENT OF LINEAR THERMAL EXPANSION FROM AMBIENT TEMPERATURE TO 100° C (K ⁻¹)	ISO 10545-8	Required		6 x 10 ⁻⁶ K ⁻¹ max
CHEMICAL PROPERTIES	SCRATCH HARDNESS (Mohs scale)	EN 101	Declared by the producer		Min 6
	RESISTANCE TO STAINING	UNI EN ISO 10545-14	Minimum Class 3		5
	RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	UNI EN ISO 10545-13	Minimum GB		GA (No visible effect)
	RESISTANCE TO HIGH AND LOW CONCENTRATIONS OF ACIDS AND ALKALIS		To be reported		GLA - GHA (No visible effect)
	SLIP RESISTANCE	DIN 51130			R10 DCOF > 0,4
		DIN 51097			B (A+B)
		AS 4586:2013			>35 P3
		DS 7976-2:2002			Dry >36 Wet >36
		ENV 12633:2006			cl. 2

Packaging info

Shipments to domestic markets (India)

Nominal	Thickness mm	Pcs. x box	Sq. mt x box	Weight x box (Kg)
120x240	9	1	2,87	60,00
80x160	9	2	2,55	54,00
60x120	9	2	1,43	30,00
60x60	9	3	1,07	23,00
30x60	9	6	1,07	23,00

Worldwide shipments

Nominal	Thickness mm	Pcs. x box	Sq. mt x box	Weight x box (Kg)	Box x pallet	Sq. Mts x pallet	Pallet weight
120x240	9	1	2,87	60,00	15	43,05	900,00
80x160	9	1	1,28	27,00	35	44,63	945,00
60x120	9	2	1,43	30,00	32	45,82	960,00
60x60	9	3	1,07	23,00	40	42,92	920,00
30x60	9	6	1,07	23,00	40	42,80	920,00

Size

Nominal Size cm	Actual Size cm
120x240	119,8x239,8
80x160	79,8x159,8
60x120	59,8x119,8
60x60	59,8x59,8
30x60	29,8x59,8





Nexion

ITALIAN STYLE THAT INSPIRES

Headquarters & Indian Sales
Nexion International Pvt Ltd
1104, Shapath V, S.G. Road
Ahmedabad, Gujarat (India)
indiancs@nexiontiles.com
www.nexiontiles.com

Design, Marketing & Global Sales
Via Dante Alighieri 18
Fiorano Modenese
Modena (Italy)
globalcs@nexiontiles.com
www.nexiontiles.com

Production & Logistics
Survey no. 171 P Unchi Mandal
Morbi Halvad highway
363642 Morbi, Gujarat (India)
logistics@nexiontiles.com